




# DEARING OF AMERICA CORP.

## INA TASE50-N bearing units

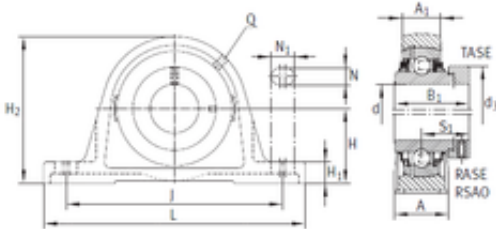

TASE50-N Bearing 2D drawings and 3D CAD models

Bearing No. TASE50-N

Bore Diameter	50 mm
d	50 mm
S1	38,2 mm
Thread (Q)	Rp1/8
d3	69 mm
A	54 mm
A1	34 mm
B1	62,8 mm
H	57,2 mm
H1	21,5 mm
H2	115 mm
J	158 mm
L	200 mm
N	18 mm
N1	23 mm
Weight	2,8 Kg
Basic dynamic load rating (C)	35 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	3.308
EAN	4012802144529
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



## DEARING OF AMERICA CORP.

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE50KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Radial   Standard Shaft Height   Metric   With Set Screw
Long Description	2 Bolt Pillow Block; 50MM Bore; 57.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 151.5MM Minimum Bolt Spacing; 163.5MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	TASE50
Weight / LBS	7.056
Base to Center Height	2.252 Inch   57.2 Millimeter
Nominal Bolt Center to Center	6.3 Inch   160 Millimeter
Bolt Spacing Minimum	5.965 Inch   151.5Millimeter
Length Thru Bore	2.469 Inch   62.7 Millimeter
Bore	1.969 Inch   50 Millimeter



## DEARING OF AMERICA CORP.

Bolt Spacing Maximum	6.437 Inch   163.5Millimeter
----------------------	------------------------------